

HARDWARE PACKED LIST IN BOX


| Allen Key | Bolt | SCREW | Flat Washer |
|------------------------------|--|----------------|--------------------------|
| (a) 05/16° 1PCS | b ø5/16"*1.5" 16PCS | © 1.5" | d |
| | <i>\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\</i> | | |
| Spring Washer Ø5/16" 24PCS | (f) Bolt OPCS | © 05/16" 8PCS | Rails plastic slat 26PCS |
| | | | |
| Center plastic slat 26PCS | Wrench Not provided | Allen Key 5mm | |
| | | | V/////// |

ASSEMBLY INSTRUCTIONS

ITEM: 1821Q


KING BED

STEP 1 Bolts to use for side rails, should already come pre-inserted on the HB. Place bolt (b) , washers (e , d) and fasten to Headboard with preinstalled hardware, Repeat step 2 for Footboard. Do not tighten until step 3.

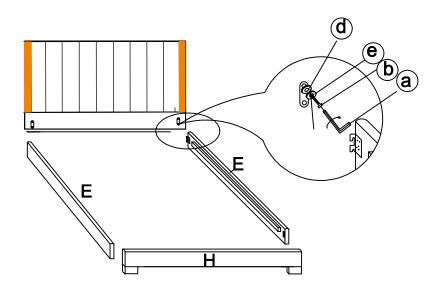


STEP 2


Attach siderail (E) to headboard (G) and footboard (H) using bolt (b) and allen key (a) as shown in diagram. Do not tighten bolts completely until assembly is completed.

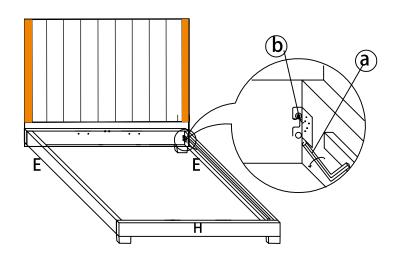


STEP 3 Attach center support (F) to headboard (G) by using bolt (b) through washers (e, d) as shown in diagram.

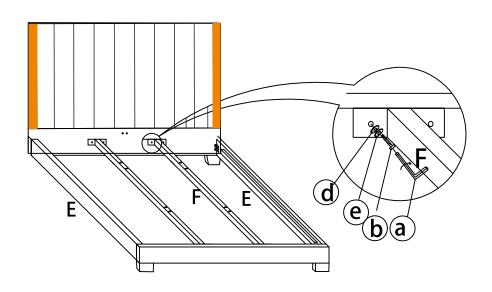


STEP 4
Attach leg support (K) to center support bar (F) by using bolt (k), washers(e, d), nut (g), and tighten the nut(g) by wrench.

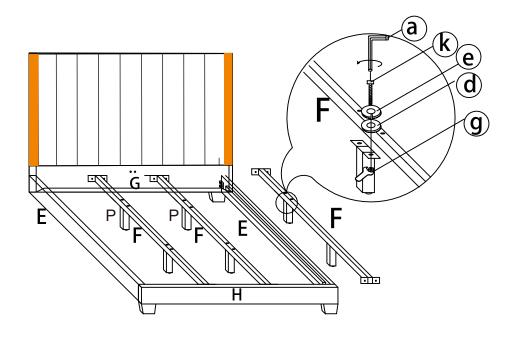

STEP 5 Insert center plastic slot (i) into holes on center support bar (F). Press firmly into place as shown in diagram. Attach rail plastic slat (h) using same procedure.

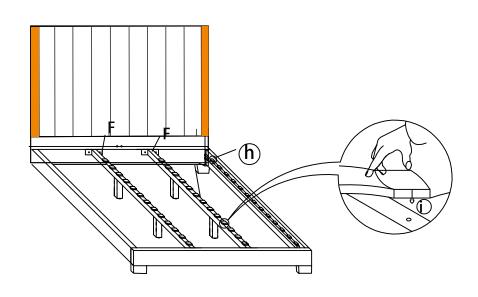

STEP 6 Insert small slat (I) into plastic slats (h, i) as shown in diagram. Attach long slat (L) to Siderail (E) with bolt f as shown.

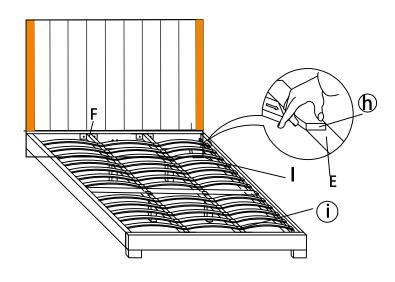

STEP 7 Assembly is complete.

